



GE APPLIANCES

Installation Instructions

Compact Laundry


WCVH4800, DCVH480, GFW148, GFT14, GFD14 and HLC1700

Platform Requirements to Meet the Guidelines for the American's with Disabilities Act (ADA)

Questions? Call GE Appliances at 800.GE.CARES (800.432.2737) or visit our Web site at: GEAppliances.com

Fabricate a wooden platform following these required instructions for ADA compliance

1. The platform must raise the appliance at least 3", but not more than 7".
2. A hardwood fascia board that is 1" thick is required on any open side of the platform. The fascia board must have a lip height of 1" above the top to allow the consumer to open the front clean-out panel. Each fascia board must be attached with minimum of six ¼" - 20 x 4" bolts with fender washers and locknuts on the backside.
3. The suggested maximum distance between lateral supports is 10".
4. Plywood top must be ¾" thick
5. The platform length can be dimensioned to fit one or multiple front loading compact laundry units.
6. The platform must be firmly secured, at least at two points, to an adjacent wall.
7. Place the front loading compact laundry unit(s) on the completed platform.
8. The front of any front loading compact laundry unit must be less than 10" from the front of the platform including the fascia board.
9. Follow the **Installation Instructions** shipped with your washer and/or dryer to complete the installation.

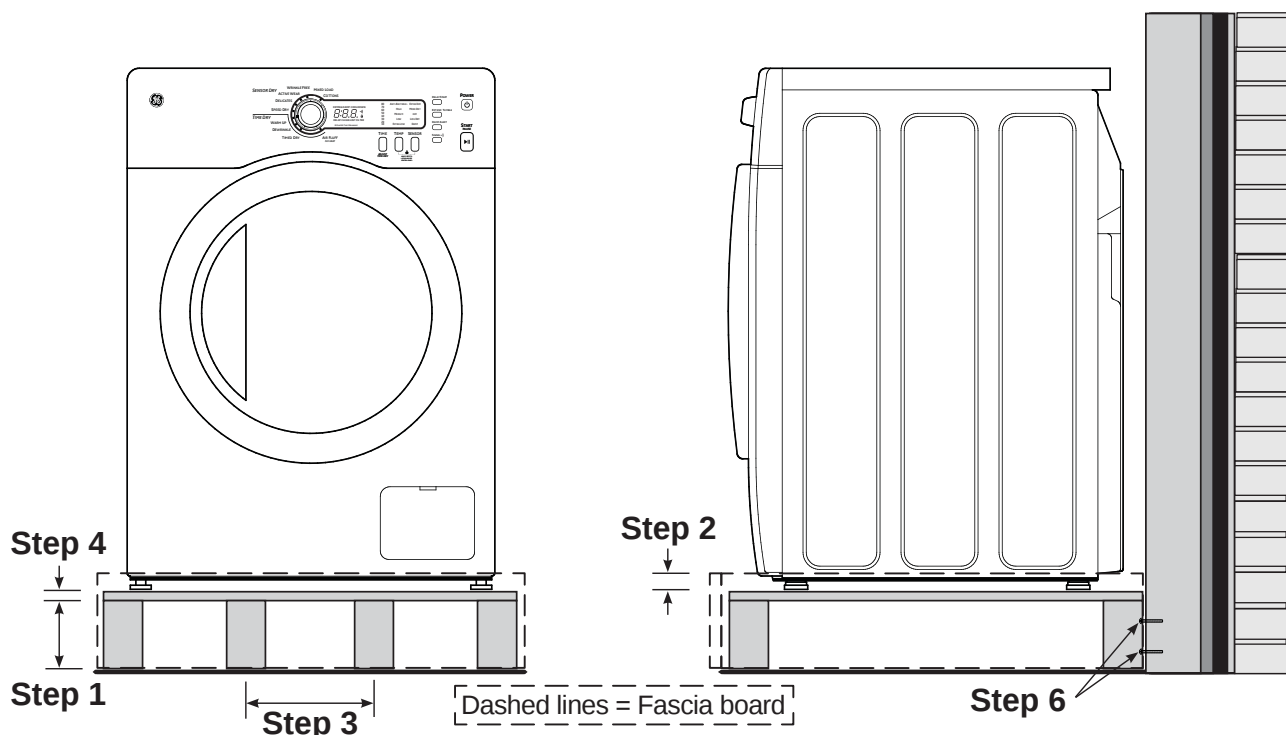

Front loading compact washer shown mounted on the wooden platform which is secured to adjacent wall