
Installation Instructions
HS-DEF Product Deflector Kit, PN. 00-914702

KIT CONTENTS


	PART NO	NAME OF PART	QTY
1	00-914649	Product Deflector Mount	1
2	SC-022-79	Mach. Screw 6-32 x 3/8 Phil. Flat Hd. (SST)	2
3	00-914596	Product Deflector Stud	1
4	00-914587	Product Deflector Adjustable Foot	1
5	00-914597	Product Deflector Cap	1
6	00-914585-00002	Product Deflector	1
	00-522815-00004	Adhesive (Loctite)	1
	00-513886-00002	Sealer (RTV)	1

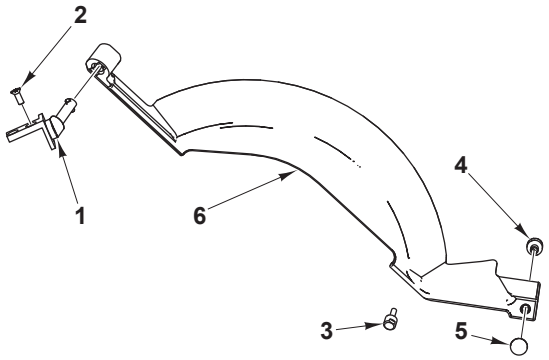


INSTALLING THE PRODUCT DEFLECTOR

⚠ WARNING Unplug the machine power cord and turn the index knob fully clockwise to close the gauge plate before installing kit.

1. Remove the sharpener assembly. Remove the two screws holding the sharpener mount spacer. Remove the spacer.

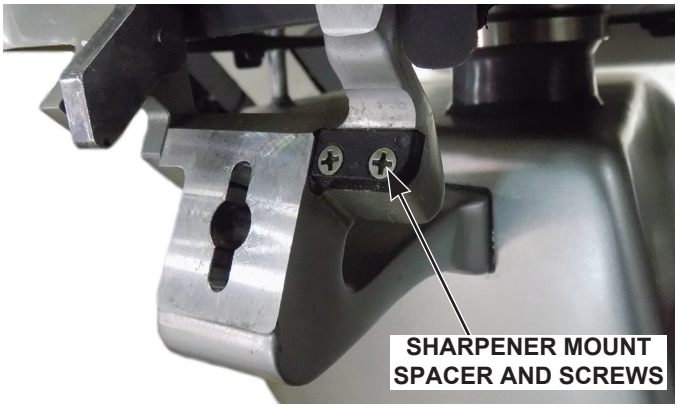


2. Put a drop of Loctite adhesive on the two 6-32 x 3/8 screws and install the Product Deflector Mount in place of the sharpener mount spacer. Seal around the Product Deflector Mount and the recesses of the screws with the supplied RTV sealant.

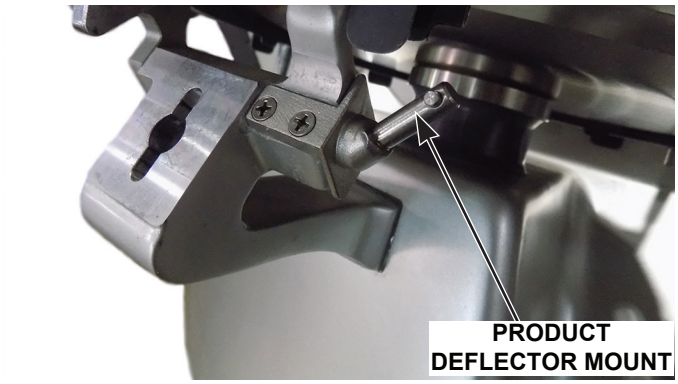

3. Remove the small machine screw at the bottom of the ring guard.



4. Install the Product Deflector Stud in the hole at the bottom of the ring guard.

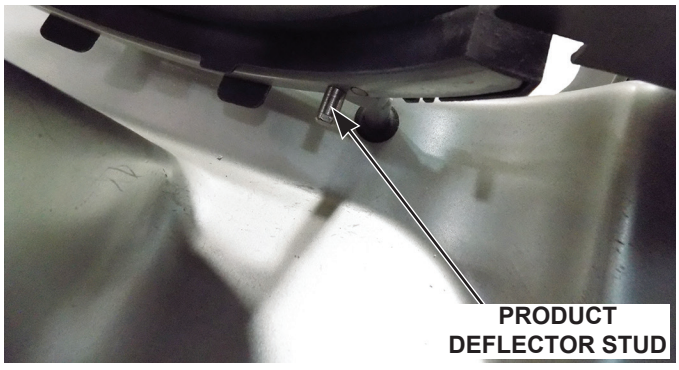

©HOBART, 2019

Installation Instructions (Cont.)

5. Install the Product Deflector Adjustable Foot onto the Product Deflector from the back side of the deflector.



6. Install the Product Deflector onto the Product Deflector Mount and swing it downward into place next to the knife. A magnet on the ring guard will connect to the foot. The Adjustable Foot may be screwed in or out to adjust the Product Deflector close to the knife so that it is not touching the knife.



7. After the Foot has been adjusted, insert the Product Deflector Cap into the front of the Product Deflector to cover the hole.

