



T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690

Model No.

B-0890-QT-VR05

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com



ADA Compliant

This Space for Architect/Engineer Approval



Job Name _____ Date _____

Model Specified _____ Quantity _____


Customer/Wholesaler _____

Contractor _____


Architect/Engineer _____

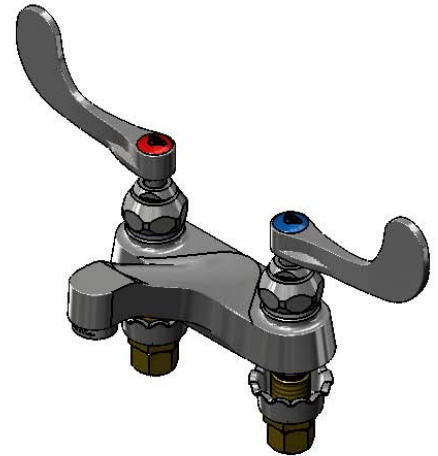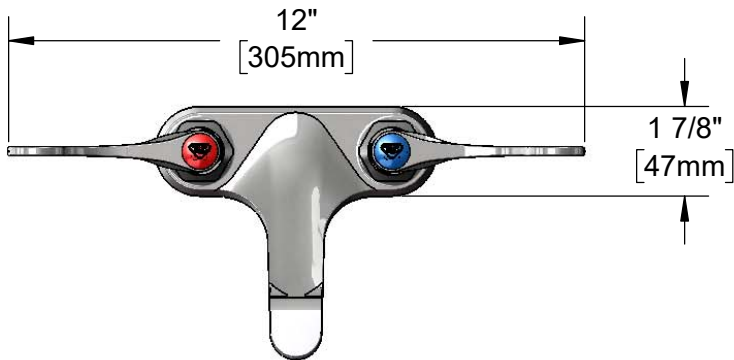

Quarter-Turn Eterna Cartridges
w/ Spring Checks &
4" Wrist Action Handles w/
VR Screws & Color Coded Indexes

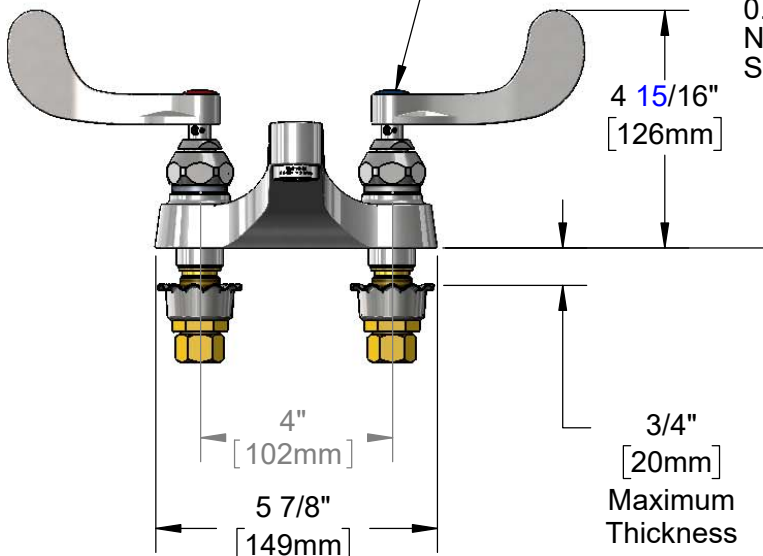

B-0199-08-N05
0.5 GPM VR
Non-Aerated
Spray Device

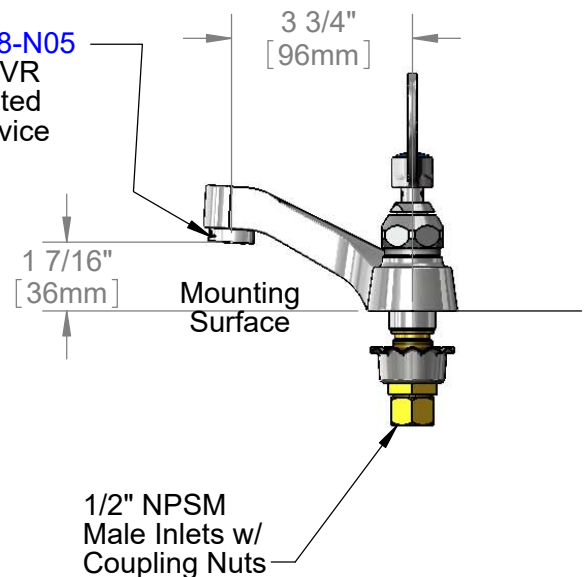

Rough-In Requirement:
(2) ϕ 1 1/8" [29mm] Mounting Holes

Product Specifications:

4" Centerset Deck Mount Faucet, Quarter-Turn Eterna Cartridges w/ Spring Checks, 4" Wrist Action Handles w/ Vandal Resistant Screws, 0.5 GPM VR Non-Aerated Spray Device & 1/2" NPSM Male Inlets w/ Coupling Nuts

Product Compliance:

ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ANSI A117.1 (ADA)



T&S BRASS AND BRONZE WORKS, INC.



2 Saddleback Cove / P.O. Box 1088
Travelers Rest, SC 29690

Model No.

B-0890-QT-VR05

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

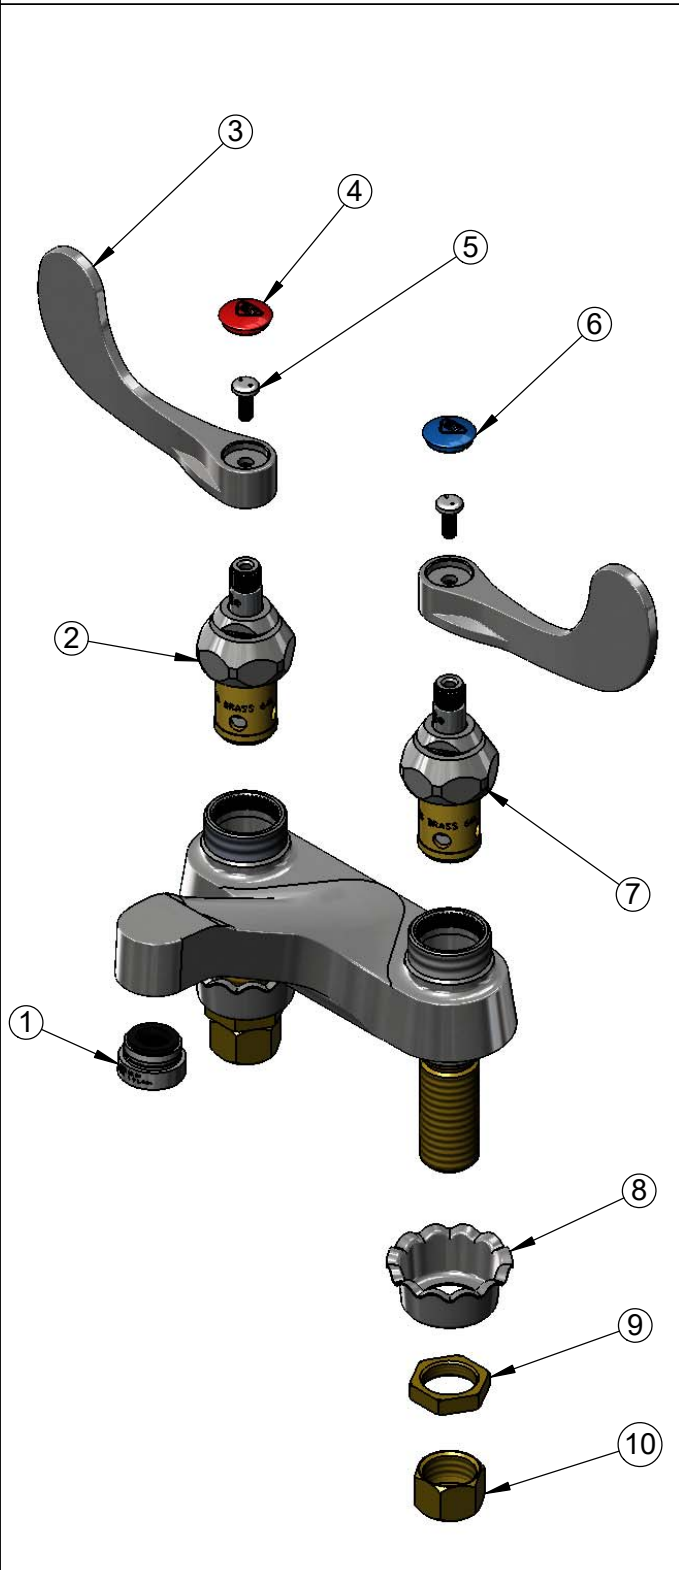	ITEM NO.	SALES NO.	DESCRIPTION
	1	B-0199-08-N05	0.5 GPM VR Spray Device, 13/16-27 Male
	2	012443-40NS	Quarter-Turn Eterna Cartridge w/ Spring Check, RTC
	3	B-WH4-NS	Wrist Action Handle (New Style)
	4	001193-19NS	Red Button Index, Press-in
	5	VRS-2	VR Wrist Action Handle Screw (2) w/ Spanner Bit
	6	018506-19NS	Blue Button Index, Press-in
	7	012442-40NS	Quarter-Turn Eterna Cartridge w/ Spring Check, LTC
	8	001000-45	Rosette Washer
	9	002954-45	Shank Lock Nut
	10	000958-20	Coupling Nut
 015425-45 Vandal Resistant Key			
 014075-45 Vandal Resistant #10 Spanner Bit			

Product Specifications:

4" Centerset Deck Mount Faucet, Quarter-Turn Eterna Cartridges w/ Spring Checks, 4" Wrist Action Handles w/ Vandal Resistant Screws, 0.5 GPM VR Non-Aerated Spray Device & 1/2" NPSM Male Inlets w/ Coupling Nuts

Product Compliance:

ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ANSI A117.1 (ADA)