



# Thank you for your business!

We trust you will find this new  
Breader/Blender/Sifter  
to be quiet, efficient, and durable.

**Please return this completed page.  
The owner is required to return this product  
registration information immediately.**

The model and serial numbers are stamped on the nameplate  
located next to the machine's controls.  
Double sifter tables have two different serial  
numbers - please list both. Please print clearly.

-----Second Fold Line-----

Place  
stamp  
here

AyrKing Corporation  
2013 Cobalt Drive  
Louisville, KY 40299-2417  
USA

-----First Fold Line-----Seal with tape-----Do not staple-----

Store Name: \_\_\_\_\_ Store I.D.#: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_ State/Province/Region: \_\_\_\_\_

Country: \_\_\_\_\_ Postal Code: \_\_\_\_\_

Telephone: \_\_\_\_\_ Fax: \_\_\_\_\_

Store Owner: \_\_\_\_\_

Model: \_\_\_\_\_ Serial Number(s): \_\_\_\_\_

**This page intentionally left blank.**



# BREADER/BLENDER/SIFTER

Operation, Maintenance, and Warranty

## For Model Number BBSU4219



Read this manual thoroughly before operating machine.  
The model and serial numbers are on the data plate mounted on the machine.  
Record the model and serial numbers below.  
Breeding tables with two machines will have two serial numbers.  
Refer to these numbers in any correspondence with AyrKing Corporation.

Model \_\_\_\_\_

Serial Number(s) \_\_\_\_\_

Note: All procedures listed on these pages are general use guidelines.  
Please refer to your company procedures for exact instructions.

## IMPORTANT SAFETY INSTRUCTIONS

Read all instructions before operating. When using electrical appliances, basic safety precautions must be followed. Use this appliance only for its intended use as described in this manual. Verify that appliance is properly installed and electrically grounded by a qualified technician in accordance with local electrical codes. Do not attempt to repair or replace electrical components. A qualified technician should complete all servicing to these components. Before performing any service, disconnect the machine's power supply. Never wear loose-fitting or hanging garments while using any appliance. Ties, necklaces, etc. may catch on moving parts...possibly causing injury.

**CAUTION** - Risk of fire and/or electrical shock. Replace only with manufacturer's cord set:  
120 volt unit uses part number B319  
240 volt unit uses part number B419

## **DO NOT SPRAY MACHINE WITH WATER**

Machine is designed to shed water & dust; however, **IT IS NOT WATER PROOF.**



## **OPERATION**

(Numbers in parenthesis refer to parts view drawings)

### **ASSEMBLY:**

- Begin each day with all components clean and thoroughly dry.
- Place lug (6) in bottom rails, tight against backstop.
- Place dough ball pan (7) in rails underneath motor compartment.
- Position sifter screen (4) so that the end with pivot pin is located away from the motor compartment.
- Install brush (5), mating end with square hole onto square drive coupling (11) and press brush towards motor until opposite end of brush shaft clears pivot pin located on sifter screen (4). Center brush shaft hole on pivot pin then release brush. Rotate brush by hand to assure proper installation.
- Place brush cover/lug support (3), bowl side up, over brush (5) so that brush cover hole is away from motor compartment.
- Place lug with hole (2) into sifter enclosure, aligning lug hole with brush cover (3) hole. Install lug plug (1) over hole in lug.

### **BLENDING:**

- Place flour and spices in top lug (2). Press start button (16). While brush (5) is in motion, remove lug plug (1) and push breadings slowly through lug hole.
- Replace lug plug (1) over hole in top lug (2). After breadings has passed through sifter screen (4) and brush (5) has stopped rotating, remove bottom lug (6) and pour breadings into top lug (2).
- Replace proper lug (6) tightly against backstop. Repeat steps for second blending of breadings.

### **SIFTING:**

- Sifting is required after dough balls form during hand breadings of product. Press start button (16). While brush (5) is in motion, remove lug plug (1) and push breadings slowly through lug hole.
- Replace lug plug (1) over hole in top lug (2). After breadings has passed through sifter screen (4) and brush (5) has stopped rotating, remove bottom lug (6) and pour breadings into top lug (2).
- Replace proper lug (6) tightly against backstop. Occasionally empty dough ball pan (7) into trash. Repeat above steps as often as needed.
- After sifting, rotate top cover (21) to allow top of sifter to be used as a table top.




## DAILY CLEANING

(Numbers in parenthesis refer to parts view drawings)

- Always disconnect power supply when servicing or cleaning machine. **NEVER SPRAY MOTOR COMPARTMENT WITH WATER.**
- Remove top & bottom lugs (2 & 6), lug plug (1), brush cover (3), brush (5), sifter screen (4), and dough ball pan (7). Take all items to wash sink.
- Clean table and sifter enclosure with a towel soaked in detergent/water solution, including the table cover (21). Be sure to clean all crevices. Wipe off soapy solution using water rinsed towel until all surfaces are clean. Soak towel in sanitizing solution (or bleach/water solution) and wipe all surfaces thoroughly.
- In wash sink, spray all removed items with hose to dislodge any breading. Soak all components in dish washing detergent and water solution.
- Brush can be cleaned by using a round brush to remove soil.
- After cleaning brush (5), rinse in detergent solution and soak in sanitizing solution for five minutes.
- After soaking, remove the brush (5) and shake away excess moisture. Place brush on square post (B219 or B219H) located on top of table, by standing on end. Allow to fully air-dry before reinstalling brush (5).
- Clean the sifter screen (4) and brush cover (3) in the detergent/water solution with a towel or scrub pad if required. Rinse off detergent solution. Soak items in sanitizing solution for one minute.
- Rinse dough ball pan (7) and replace in sifter. Reinstall sifter screen (4). Place brush cover (3) on tabletop. Allow all components to thoroughly dry before re-using.
- Clean the lugs (2 & 6) and lug plug (1) in sink with towel or scrub pad if required. Rinse off detergent solution. Place items in sanitizing solution and soak for one minute. Place items upside down on tabletop to air-dry. Allow all components to thoroughly dry before re-using.

# BBSU4219 PARTS VIEW

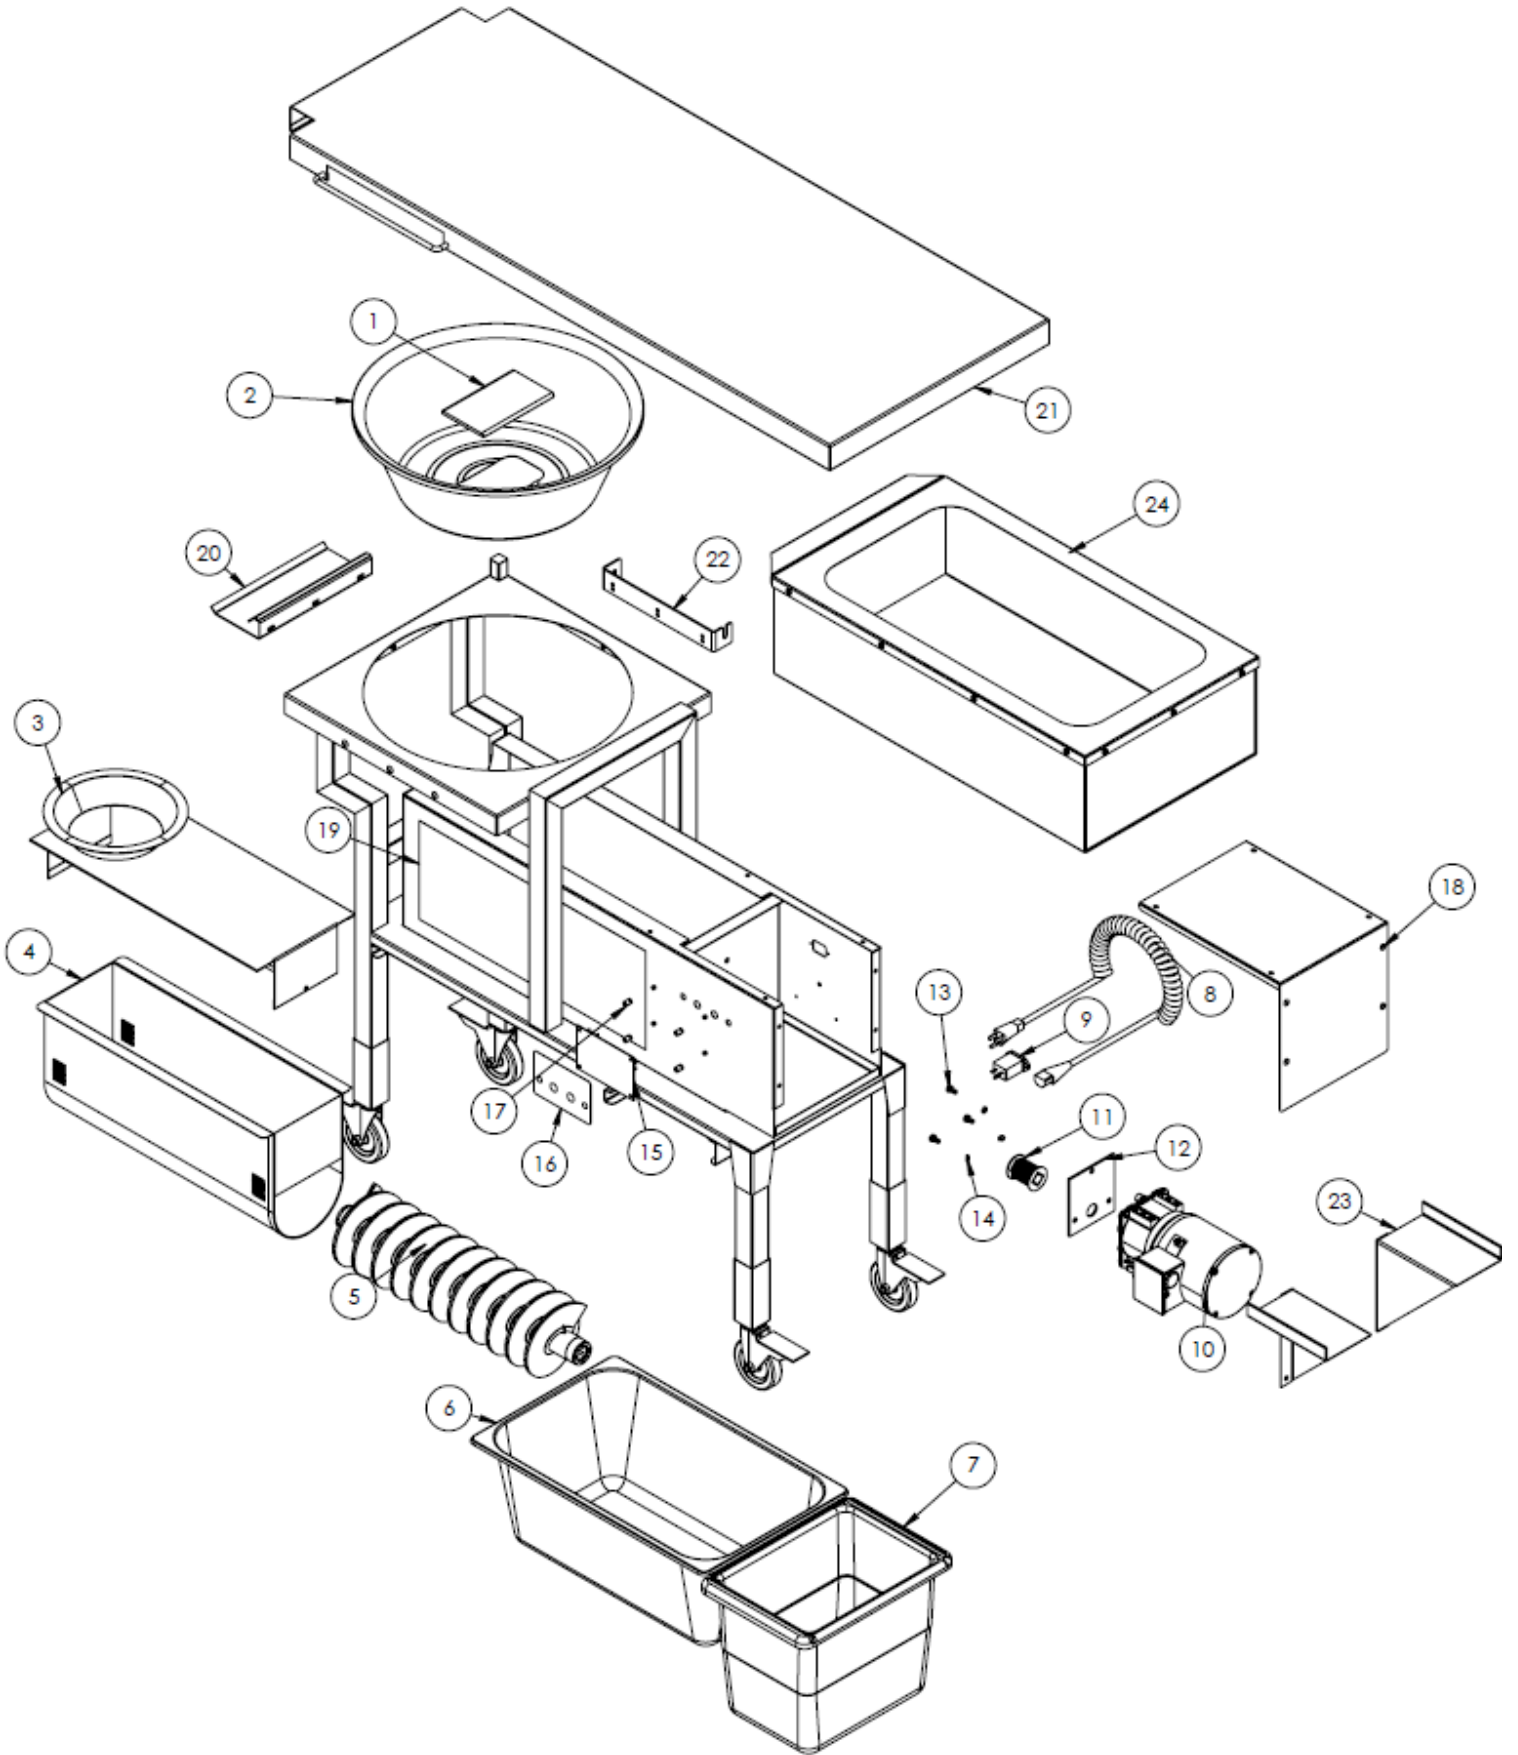



## BBSU4219 PARTS LIST

EACH ITEM HAS DIFFERENT PART NUMBERS DEPENDING ON THE SIFTER MODEL

ITEM	PART #	DESCRIPTION [NOMINAL SIZE]
1	<a href="#">B101</a> <a href="#">B101S</a>	LUG PLUG, PLASTIC SILICONE LUG PLUG
2	<a href="#">B639</a>	S/S ROUND BREADING BOWL W/ HOLE
3	<a href="#">B201RC16</a>	20" LONG BRUSH COVER W/ 2" ROUND COLLAR
4	<a href="#">B202S</a>	SIFTER SCREEN
5	<a href="#">B150S</a> <a href="#">B160S</a>	SIFTER BRUSH ASSEMBLY, BLACK BRISTLES, 20" (508mm) LONG SIFTER BRUSH ASSEMBLY, WHITE BRISTLES, 20" (508mm) LONG
6	<a href="#">B106</a>	LUG, S/S FULL SIZE 8" DEEP WITHOUT HOLE
7	<a href="#">B304</a>	DOUGH BALL PAN, PLASTIC DOUGH BALL PAN, STAINLESS STEEL
8	<a href="#">B319</a> B419 B419E	COILED POWER CORD, NEMA 5-15 PLUG 120V USA & CANADA [24" (610mm)] POWER CORD, NEMA 6-15 PLUG - 240V [96" (2438mm)] POWER CORD, BRITISH 10A/250V PLUG WITH 10A FUSE [96" (2438mm)]
9	<a href="#">B145</a>	RECEPTACLE-UNIVERSAL 120/240V THREE-PRONG MALE WITH NOISE FILTER
10	<a href="#">B117</a>	PARALLEL SHAFT GEAR MOTOR - 115/230 VOLT, 50/60 Hz
11	<a href="#">B206</a>	DRIVE COUPLING ASSEMBLY FOR BBS-U
12	<a href="#">B207</a>	MOTOR COMPARTMENT SEAL
13	<a href="#">B403</a>	BOLT - MOTOR ASSEMBLY
14	<a href="#">B404</a>	LOCK WASHER - MOTOR ASSEMBLY
15	<a href="#">B530</a>	CIRCUIT BOARD TIMER RELAY - 120/240 VOLT, 50/60 Hz
16	<a href="#">B531</a>	CONTROL PANEL OVERLAY
17	<a href="#">B532</a>	NYLON WASHER/SPACER SET FOR B530
18	B405	SCREW - MOTOR COVER
19	<a href="#">B121</a>	INSTRUCTION LABEL (B120 FOR BBS-M-3314, MANUAL SIFTER)
20	<a href="#">B411</a>	BUN PAN C-CLIP
21	B308T	S/S COVER FOR BBSUL4219KK
22	B308BL B308BR	RIGHT FLOW S/S BRACKET FOR MOUNTING B308T LEFT FLOW S/S BRACKET FOR MOUNTING B308T
23	B308S	S/S ICE BATH SUPPORT BRACKETS
24	<a href="#">IB28</a>	28" ICE BATH



## BBS GENERAL PARTS & ACCESSORIES

EACH ITEM HAS DIFFERENT PART NUMBERS DEPENDING ON THE SIFTER MODEL

<a href="#">B219</a>	BRUSH POST (LOCATED ON TOP OF TABLE)
<a href="#">B219H</a>	WIRE SHELF BRUSH POST HANGER
<a href="#">B146</a>	P-SHAPED PLASTIC CLIP TO AFFIX POWER CORD TO SIFTER
B171	USER'S MANUAL
<a href="#">B313</a>	RECTANGULAR WIRE BASKET WITH HANDLE & FRONT HOOK FOR ½ SIZE
<a href="#">B313NH</a>	RECTANGULAR WIRE BASKET W/ HANDLE & NO FRONT HOOK FOR ½ SIZE
<a href="#">B619</a>	STAINLESS STEEL WIRE BATTER BASKET
<a href="#">B631</a>	3.5" CASTER WITH BRAKE



## PROBLEM SOLVING GUIDE

Many problems have a simple solution. Please use this guide to help resolve operational difficulties. Visit [www.ayrking.com/maintenance/](http://www.ayrking.com/maintenance/) for DIY Guides.

Contact AyrKing Corporation if unable to correct any problem.

### **PROBLEM**

### **POSSIBLE SOLUTIONS**

*Flour on floor.*

Push bottom lug tight against backstop. Check dough ball pan level, empty if full.

*Dough balls in sifted breading.*

Check proper position of brush cover. Check dough ball pan level, empty if full. Check that pivot pin end of screen is positioned tight against sifter enclosure. Inspect screen for damage, replace if necessary.

*Excessive flour in dough ball pan.*

When brush is new (first few days of operation) this is normal until brush develops a set. For first few days push flour into brush area slower. Verify that holes in brush cover and in top lug are at opposite end of screen from motor compartment. Brush may be worn out, replace with new brush.


*Brush and/or screen clogged with flour. Brush not in proper contact with screen.*

Make certain that the brush and sifter screen are thoroughly dry before use. Check brush for flattened bristles. If evident, wash brush in hot water and air-dry on brush post in vertical position. (Never lay brush in flat position to dry). This is recommended only as a procedure to straighten flattened bristles. Usually bristles should not be subjected to hot water. If this fails to cure the problem, replace brush. (Note: daily cleaning and thorough, proper drying extend brush life). Brush may be worn out, replace with new brush.

*Dough balls in sifter screen. Motor will not operate.*

Check dough ball pan, empty if full. Check power source (plug, circuit breaker, frayed wires, etc.). Verify proper mechanical motion of start push button. Have qualified technician check operation of components.

# ELECTRICAL SCHEMATICS

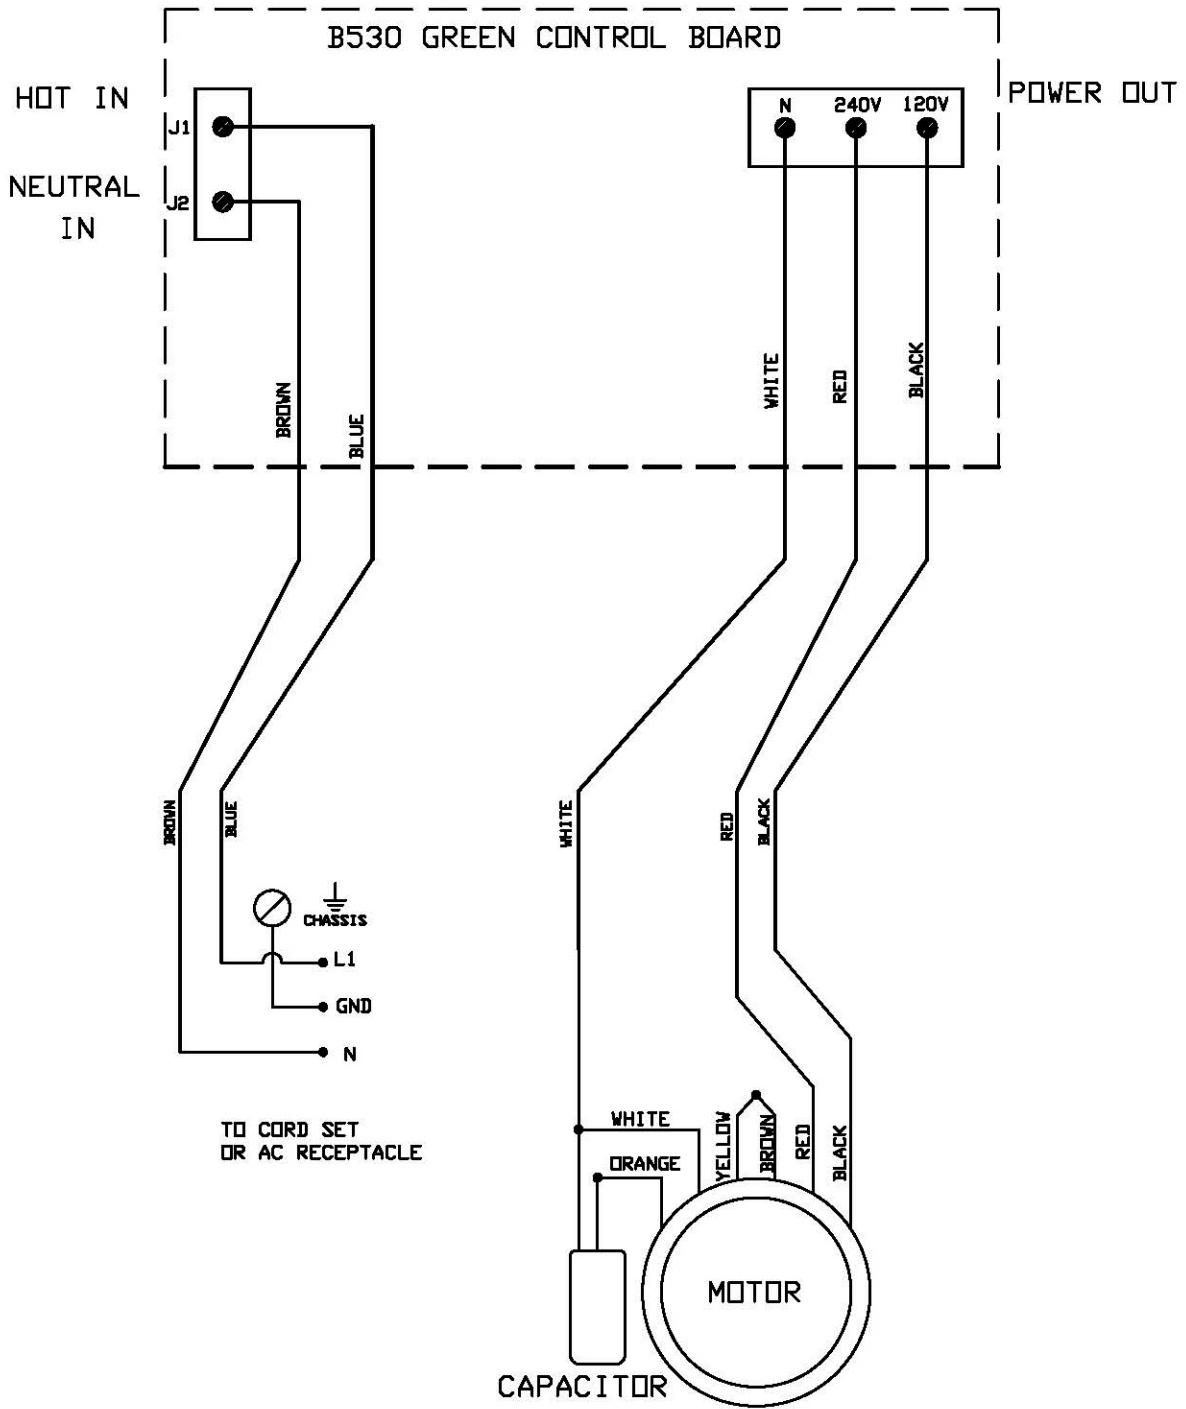



## **TERMS AND CONDITIONS**

### **Description**

This warranty is in effect for AyrKing equipment used within North America. See the International Claims section for warranty claims outside of North America. AyrKing warrants that the AyrKing equipment shall be free from original defects in workmanship and material, provided the equipment has been properly stored, installed, serviced, maintained, and operated. AyrKing extends this warranty to the original purchaser only. This warranty specifically covers the mechanical and electrical components for our equipment.

### **Registration**

The end user must register ownership of their equipment with AyrKing Corporation by returning the warranty card supplied with the machine or registering their equipment on the AyrKing website at <https://parts.ayrking.com/register>.

### **Coverage**

This warranty provides non-prorated replacement of defective components and labor coverage. This warranty begins on the date of first use or 60 days (about 2 months) from the date of shipment from AyrKing's warehouses, whichever occurs first unless proof of installation can be provided. **The parts warranty is in effect for 12 months. The labor warranty is in effect for 90 days (about 3 months).** The manufacturer's obligation under this warranty shall be the replacement or repair of defective parts within the warranty period. Excessive labor (more than 1/2 hour) required to access AyrKing equipment built into cabinets, tables, or structures by others, is NOT covered under this labor warranty. All labor shall be performed during regular working hours. AyrKing will not reimburse overtime premiums.

If, upon inspection, it is determined that this AyrKing equipment has not been properly installed, used appropriately, modified or maintained, the warranty will be void. If the equipment has been subjected to misuse or misapplication, neglect, abuse, accident, damage during transit or delivery, fire, flood, riot or acts of God, then this warranty shall also be void. When any situation occurs which voids the warranty then AyrKing shall not be liable for any damage to any person or any property which may result from the use of the equipment thereafter. The warranty is limited to AyrKing manufactured equipment only and does not apply to other equipment which may be connected to or installed within.

### **Claims**

Notify AyrKing of any performance failure (1-502-266-6270). Specify model and serial number of the equipment when contacting AyrKing. AyrKing personnel will help in evaluating the cause of failure, ship any necessary replacement components, and authorize a service agency call if applicable. Replacement components will be supplied and shipped at no cost (via least expensive route) to the end user if they return the defective part within two weeks (if required by AyrKing). AyrKing reserves the right to test and evaluate the failed part to determine whether the failure is covered by this warranty. If AyrKing does not receive defective components within two weeks of replacement part shipment (if required by AyrKing) or if the failure is determined not to be covered under this warranty, AyrKing will invoice the end user for the replacement part, shipping costs, and labor charges if applicable.

**\*\*AyrKing will reimburse up to 1 Hour of labor charges. Contact AyrKing tech support for approval if any repair will take over 1 hour to complete.** 502-266-6270 Tech Support

**\*\*AyrKing reserves the right to deny all labor (time) charges considered excessive for any repair.**

**\*\*AyrKing will not reimburse the cost of warranty parts bought from other vendors or parts suppliers.**

### **International Claims**

Please contact your kitchen equipment supplier to process warranty claims. AyrKing will reimburse the supplier for warranty repairs. The parts warranty is in effect for 12 months. The labor warranty is in effect for 90 days.



## TERMS AND CONDITIONS (CONTINUED)

### **Missing or damaged Items**

Claims of items missing from a shipment or damaged in transit must be reported within five (5) business days of receipt of the merchandise. Anytime you receive items, please take some time to carefully inspect the equipment. Each shipment will include a packing label on the box. Please verify the receipt of all items listed on the packing label.

### **Order Cancellation**

- **Unshipped Order:** If the order is still open in AyrKing's system, please contact AyrKing's customer care team to cancel the order. The customer may not be charged any shipping or restocking fees if the order has not been prepared or shipped.
- **Shipped Order:** If the customer order has already shipped, the customer may refuse the shipment when it arrives, or the customer can accept the order and start a return authorization through AyrKing's returns process. When a shipment is refused, it will come back to AyrKing's warehouse, and the customer will be charged a restocking fee and any shipping fees associated with the return.
- **Received Order:** If the customer already received their purchased item(s), the customer must contact AyrKing's customer appreciation team to start a return. The customer will be provided with a return authorization number and instructions on how to ship their items back.

### **Standard Returns**

Unused, regularly stocked items may be returned by contacting AyrKing's customer relations team within **90 days (about 3 months)** of the invoice date. A representative will create a return authorization and provide further instructions for completing the return process. Each return is subject to a 20 percent restocking fee which will be deducted from the refund amount. The customer will also be responsible for securing a shipping agent to return the merchandise, plus all shipping fees incurred.

### **Restocking Fees**

There are many costs involved in processing a return. AyrKing charges a 20 percent restocking fee for all items returned.